

PRODUCT DATA SHEET (REV20250527)

PC / POLYCARBONATE **FROSTED CLEAR** SHEET


Frosted Polycarbonate for Stylish Impact-Resistant Interiors and Signage.

SRT Plastics Polycarbonate Clear Frosted is a transparent sheet with a refined frosted surface finish, perfect for projects that demand a modern aesthetic, diffused appearance, and durable performance.

Combining high impact resistance with thermoformability and fire safety compliance, Clear Frost offers a functional and elegant alternative to glass in interior and display applications. Available in multiple transparent tints upon request, it brings design flexibility with reliable strength.


KEY ADVANTAGES

- Modern frosted finish with excellent aesthetic appeal
- Over 10× stronger than high-impact PMMA
- Half the weight of glass for easier handling and mounting
- Easy to cut, machine, and thermoform
- Suitable for backlit or diffused light effects
- Available in a range of transparent colour options

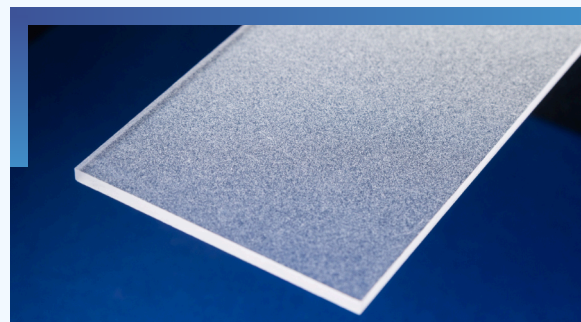

TYPICAL APPLICATIONS

- Interior design panels and privacy screens
- High-end retail displays and visual merchandising
- Signage requiring a diffused or matte appearance
- Decorative covers and architectural partitions
- Lightboxes and illuminated wall features
- Protective yet stylish panels for commercial interiors

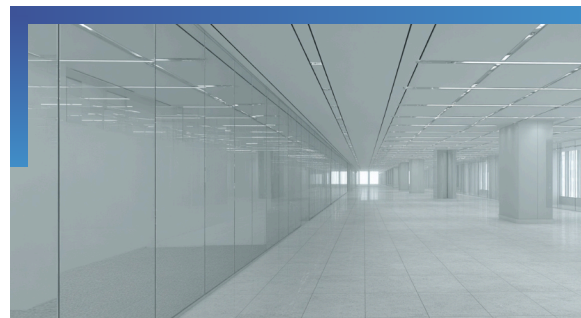

AVAILABLE DIMENSIONS

- Standard Sheet Sizes: 2050 x 1100 mm
- Thickness Range: 2 mm to 6 mm
- Colours: Coloured sheets available on request
- Embossing: Smooth
- Other sizes and thicknesses on request



The information contained within this datasheet is for guidance only.

The data is not exhaustive. All figures quoted are nominal. Any applications should be checked with SRT Plastics prior to use.

PRODUCT DATA SHEET (REV20250527)

PC / POLYCARBONATE **FROSTED CLEAR** SHEET

PROPERTY	VALUE	UNIT	STANDARD
PHYSICAL PROPERTIES			
Density	1,2	g/cm ³	ISO 1183
Refractive index (20°C)	1.586	-	ISO 489
Moisture Absorption (24h, 23°C, 50% RH)	0.15	%	ISO 62
MECHANICAL PROPERTIES			
Tensile Strength (Yield / Break)	60 / 70	N/mm ²	ISO 527
Elongation (Yield / Break)	6 / 110	%	ISO 527
Elastic Modulus	>2300	N/mm ²	ISO 527
Flexural Modulus	>2300	N/mm ²	ISO 178
Impact Strength (charpy unnotched, -40°C)	NB	kJ/m ²	ISO 179
Impact Strength (charpy notched, -30°C)	11	kJ/m ²	ISO 179
Izod Notched Impact (+23°C / -30°C)	65 / 10	kJ/m ²	ISO 180
THERMAL PROPERTIES			
Heat Deflection Temp (HDT A - 1.80 Nmm ²)	132	°C	ISO 75
Heat Deflection Temp (HDT B - 0.45 Nmm ²)	142	°C	ISO 75
Vicat Softening Temp (VST - B120 / B50)	149 / 148 °C	°C	ISO 306
Thermal Conductivity	0.20	W/m-K	ISO 8302
Linear Thermal Expansion (20°C - 70°C)	65x10 ⁻⁶	K ⁻¹	ISO 11359-2
ELECTRICAL PROPERTIES			
Volume Resistivity (Dry)	>10 ¹⁴	Ω.m	IEC 62631
Surface Resistivity (Dry)	10 ¹⁶	Ω	IEC 62631
Dielectric Strength (Dry)	30	kV/mm	IEC 60243
Dielectric Constant (Dry, 50Hz)	3		IEC 62631
Dielectric Constant (Dry 1MHz)	2.9		IEC 62631
Dissipation Factor (tan δ) (Dry 50Hz)	0.001		IEC 62631
Dissipation Factor (tan δ) (Dry 1MHz)	0.01		IEC 62631

The information contained within this datasheet is for guidance only.

The data is not exhaustive. All figures quoted are nominal. Any applications should be checked with SRT Plastics prior to use.